


**von
arx**®
TRUE QUALITY SINCE 1941

www.VONARX.com

QUALITY

PRODUCTS



 Swiss design


Produced in EU 

Table of contents

SCARIFIERS	3
VA 10 L.....	4
FR 200	5
VA 25 S.....	8
VA 30 S	10
VA 30 SH.....	11
VA 35 SH.....	13
SHAVERS	14
DTF 25 SH.....	15
DTF 35 SH.....	17
FLOOR SCRAPERS	21
SC 20	22
SC 35.....	22
SC 25	22
NEEDLE SCALERS	24
B/BG serie.....	25
NP/NP-K serie.....	26
PNEUMATIC SCABBLERS	28
DK 1 H.....	29
DK 3 H.....	29
DK 2 H.....	29
DK 7	29
DUST EXTRACTORS	31
S2	32
S3.....	32
T6.....	34
T7 / T8.....	34
T10	34
T10 LPG	35
PRE-SEPARATORS	36

SCARIFIERS

The Optimal Choice for Surface Preparation

VonArx scarifiers deliver industry-leading surface preparation through advanced rotary technology, effectively removing coatings and contaminants with precise depth control across multiple substrate types.

These professional-grade machines combine premium construction with ergonomic design, ensuring exceptional durability and reduced operator fatigue during demanding industrial applications.

Trusted by discerning contractors worldwide, VonArx scarifiers represent the benchmark solution for organizations requiring superior preparation outcomes, enhanced productivity, and consistent, high-quality results.

Main features

Working width	100 mm (4")
Distance to wall	20 mm (0.8")
Depth hard concrete	1 mm / .03"
Depth regular concrete	3 mm / .09"
Production / h	20-25 m ² / 270 sqf
Standard cutters included	Pentagonal carbide

VA 10 L



VA 10 L

Article	Power	Wattage / HP
702311	230V / 50Hz	2.2 kW

Tool sets and drums

Sets		Drums		
701027	<ul style="list-style-type: none"> » 4 flail shafts » 0.5kg washers » 36 pcs pentagonal cutters small 		701006 Application: Roughening concrete/asphalt; removing coatings	
701928	<ul style="list-style-type: none"> » 4 flail shafts » 0.6kg washers » 36 pcs hexagonal cutters small 		706561 Application: Roughening concrete/asphalt; removing coatings	
701028	<ul style="list-style-type: none"> » 4 flail shafts » 2.4kg beam cutters small 		701007 Application: Removing road markings/paint from asphalt/concrete. Modifying large steel structures	
701031	<ul style="list-style-type: none"> » 4 flail shafts » 0.8kg washers » 16 pcs milling cutters small 		701009 Application: Removing and stripping thermoplastic and cold plastic coatings and markings	
701030	<ul style="list-style-type: none"> » 4 flail shafts » 0.8kg washers » 8 pcs milling cutters small 		701008 Application: Removing and stripping thermoplastic and cold plastic coatings and markings	
707529	<ul style="list-style-type: none"> » 4 flail shafts » 0.7kg washers » 16 pcs special VHM-milling cutters small 		707528 Application: Removing and stripping thermoplastic and cold plastic coatings and markings	
			Empty drum - 700998	
Steel wire brush fine			Steel wire brush coarse	
700981	Application: Polishing/cleaning surfaces; removing light rust		700982	Application: Polishing/cleaning surfaces; removing light rust

Main features

Working width	20 cm / 8"
Distance to wall	6,7 cm / 2,6"
Depth hard concrete	Surface
Depth regular concrete	3 mm / .12"
Production / h	35-40 m ² / 370 sqf
Standard cutters included	Pentagonal carbide

FR 200



FR 200 electric


Article	Power	Wattage / HP
701449G	230 V, 50 HZ	2,2 Kw / 3HP
800001G	230 V, 60 HZ	2,2 Kw / 3HP

FR 200 electric

Article	Power	Wattage / HP
701477G	3x400 V, 50 / 60 HZ	2,2 Kw / 3HP
800004G	115 V, 50 HZ	1,5 Kw / 2HP
800006G	115V, 60 HZ	1,1 Kw / 1,5HP

FR 200 gasoline

Article	Power	Wattage / HP
701436G	Honda, gasoline	5.3 HP



Accessories


SF 60 Side attachment unit

Article	Working width	Distance to wall
706294	60 mm / 2.4"	17 mm / 0.7"







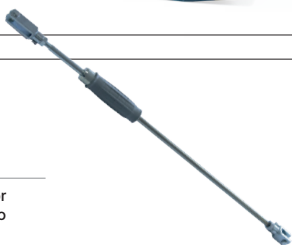





FE 200 Fine adjustment for FR 200

Article	Description
707387	Stepless vertical adjustment for accurate working, attachable to each VonArx FR 200 machine.
















FR 200 Tool sets and drums

Sets		Drums
701505 » 4 flail shafts » 0.5kg washers » 76 pcs pentagonal cutters		701422 Application: Roughening concrete/asphalt; removing coatings 
701930 » 4 flail shafts » 0.6kg washers » 76 pcs hexagonal cutters		706563 Application: Roughening concrete/asphalt; removing coatings 
701506 » 4 flail shafts » 4.5 kg beam cutters		701423 Application: Removing road markings/paint from asphalt/ concrete. Modifying large steel structures 
701508 » 4 flail shafts » 0.8kg washers » 40 pcs milling cutters		701425 Application: removing and stripping thermoplastic and cold plastic coatings and markings 
701507 » 4 flail shafts » 0.8kg washers » 24 pcs milling cutters		701424 Application: Removing thermoplastic and cold plastic coatings/markings 


Sets	Drums
<p>701997</p> <p>4 flail shafts, 0.8kg washers, 16 pcs milling cutters</p> 	<p>702208</p> <p>Application: Removing thermoplastic and cold plastic coatings/markings</p> 
<p>Empty drum - 701416</p> 	
Steel wire brush fine	Steel wire brush coarse
<p>700981</p> <p>Application: Polishing/cleaning surfaces; removing light rust</p> 	<p>700982</p> <p>Application: Polishing/cleaning surfaces; removing light rust</p> 

Note: You need 2 brushes for getting the normal drum size.

SF 60 Tool sets and drums

Sets	Drums
<p>701105</p> <ul style="list-style-type: none"> » 4 flail shafts » 0.325kg washers » 24 pcs pentagonal cutters 	<p>701094</p> <p>Application: Roughening concrete/asphalt; removing coatings</p> 
<p>701955</p> <ul style="list-style-type: none"> » 4 flail shafts » 0.352kg washers » 24 pcs hexagonal cutters 	<p>706562</p> <p>Application: Roughening concrete/asphalt; removing coatings</p> 
<p>701106</p> <ul style="list-style-type: none"> » 4 flail shafts » 1.456 kg beam cutters 	<p>701095</p> <p>Removing road markings/paint from asphalt/concrete. Modifying large steel structures</p> 
<p>707531</p> <ul style="list-style-type: none"> » 4 flail shafts » 0.61kg washers » 8 pcs milling cutters 	<p>707530</p> <p>Application: Removing thermoplastic and cold plastic coatings/markings</p> 
<p>701108</p> <ul style="list-style-type: none"> » 4 flail shafts » 0.61kg washers » 8 pcs milling cutters 	<p>701097</p> <p>Application: Removing thermoplastic and cold plastic coatings/markings</p> 
<p>701107</p> <ul style="list-style-type: none"> » 4 flail shafts » 0.61kg washers » 8 pcs milling cutters 	<p>701096</p> <p>Removing thermoplastic and cold plastic coatings/markings</p> 
<p>Empty drum - 701083</p> 	

VA 25 S

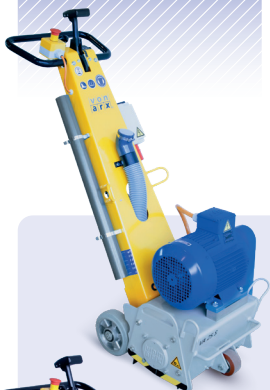

Main features

Working width	25 cm / 10"
Distance to wall	6.7 cm / 2.6"
Depth hard concrete	3 mm / .12"
Depth regular concrete	6 mm / .24"
Production / h	40-45 m ² / 430 sqf
Standard cutters included	Hexagonal carbide

VA 25 S electric

Article	Power	Wattage / HP
709554	3×230 V, 50 HZ	4 Kw / 5.3HP
706289	3×400 V, 50 HZ	4 Kw / 5.3HP




















VA 25 S gasoline

Article	Power	Wattage / HP
707335	Gasoline	5,3 Kw / 7.1HP



VA 25 S tool sets and drums

Sets		Drums
702591 » 6 flail shafts » 1,2 kg washers » 81 pcs pentagonal cutters small		707191 Application: Roughening concrete/asphalt; removing coatings 
706692 » 6 flail shafts » 1.2 kg washers » 81 pcs hexagonal cutters small		706563 Application: Roughening concrete/asphalt; removing coatings 
706306 » 6 flail shafts » 1.2 kg washers » 81 pcs hexagonal cutters small		706946 Application: Roughening concrete/asphalt; removing coatings 
702592 6 flail shafts, 5.0 kg beam cutters small		707192 Removing road markings/ paint from asphalt/concrete. Modifying large steel structures 
702385 » 6 flail shafts » 5.0 kg beam cutters large		706948 Removing road markings/ paint from asphalt/concrete. Modifying large steel structures 
702594 » 6 flail shafts » 1.0 kg washers » 45 pcs milling cutters large		707193 Application: Removing thermoplastic and cold plastic coatings/markings 
702593 » 6 flail shafts » 0.6 kg washers » 27 pcs milling cutters small		701424 Application: Removing thermoplastic and cold plastic coatings/markings 
702387 » 6 flail shafts » 1.1kg washers » 27 pcs milling cutters medium		706947 Application: Removing thermoplastic and cold plastic coatings/markings 
		Empty drum - 702200 

VA 30 S

Main features

Working width	30 cm / 12"
Distance to wall	9 cm / 3.5"
Depth hard concrete	5 mm / .24"
Depth regular concrete	7 mm / .35"
Production / h	50-55 m ² / 540 sqf
Standard cutters included	Octagonal carbide



VA 30 S electric

Article	Power	Wattage / HP
800013	3 × 230 V, 60 HZ	7,5 Kw / 10HP
706267	3 × 400 V, 50 HZ	7,5 Kw / 10HP
800010	3 × 480 V, 60 HZ	7,5 Kw / 10HP



VA 30 S electric, dual

Article	Power	Wattage / HP
707373	3 × 230 / 400 V dual, 50 HZ	5,5 Kw / 7.4HP



VA 30 S Gasoline

Article	Power	Wattage / HP
706275	Gasoline	6 Kw / 8HP

Main features

Working width	30 cm / 12"
Distance to wall	9 cm / 3.5"
Depth hard concrete	6 mm / .27"
Depth regular concrete	8 mm / .40"
Production / h	50-55 m ² / 540 sqf
Standard cutters included	Octagonal carbide


VA 30 SH

VA 30 SH electric







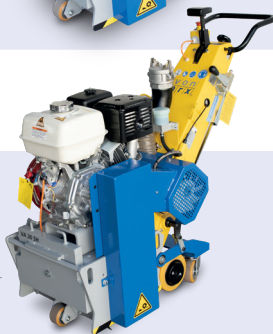






Article	Power	Wattage / HP
707199	3 × 400 V, 50 HZ	7,5 Kw / 10HP
800014	3 × 230 V, 60 HZ	7,5 Kw / 10HP
800007	3 × 480 V, 60 HZ	7,5 Kw / 10HP

VA 30 SH
gasoline with hydraulic traction

Article	Power	Wattage / HP
707533	Gasoline	8,2 Kw / 11 HP



VA 30 S / SH sets and drums

Sets		Drums	
701836 » 4 flail shafts » 5.0kg washers » 72 pcs octagonal cutters large		701691 Application: Roughening concrete/asphalt; removing coatings	
706691 » 4 flail shafts » 5.0kg washers » 72 pcs bihexagonal cutters large		706566 Application: Roughening concrete/asphalt; removing coatings	
701839 » 4 flail shafts » 5.8kg washers » 11.6kg beam cutters large		701694 Removing road markings/ paint from asphalt/ concrete. Modifying large steel structures	
701841 » 4 flail shafts » 6.0kg washers » 24 pcs milling cutters small		701696 Application: Removing thermoplastic and cold plastic coatings/markings	
701840 » 4 flail shafts » 6.0kg washers » 12 pcs milling cutters large		701695 Application: Removing thermoplastic and cold plastic coatings/markings	
701842 » 4 flail shafts » 6.0kg washers » 12 pcs milling cutters large		701697 Application: Roughening concrete/asphalt; removing coatings	
Empty drum - 701680			



VA 35 SH

Main features

Working width	35 cm / 14"
Distance to wall	14 cm / 5.5"
Depth hard concrete	8 mm / .31"
Depth regular concrete	11 mm / .43"
Production / h	60-65 m ² / 700 sqf
Standard cutters included	Octagonal carbide



VA 35 SH electric

Article	Power	Wattage / HP
800112	3 × 400 V, 50 HZ	11 Kw / 15HP
800193	3 × 480 V, 60 HZ	12.6 Kw / 17HP

VA 35 SH sets and drums

Sets

800198


- » 4 flail shafts
- » 124 washers
- » 80 pcs octagonal cutters large



Drums

600312

Application: Roughening concrete/asphalt; removing coatings

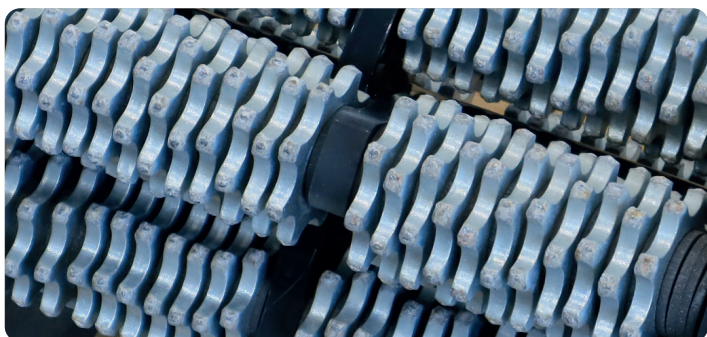



SHAVERS

Smooth Surfaces, Effortless Operation

VonArx concrete shavers utilize specialized diamond blades to deliver precise cutting performance with exceptional depth control and edge definition.

Their robust construction and powerful motors ensure consistent material removal across varied concrete surfaces while maintaining accurate tracking for straight-line applications.

Preferred by concrete professionals for their reliability and precision, VonArx shavers excel in creating expansion joints, decorative scoring, and surface texture applications where exacting standards are required.

DTF 25 SH



Main features

Working width	25 cm / 10"
Distance to wall	10 cm / 3.9"
Depth hard concrete	10 mm / .40"
Depth regular concrete	12 mm / .48"

DTF 25 SH - Electric

Article	Power	Wattage / HP
708697	3×400 V, 50 HZ	11 kW / 30 HP
800015	3×480 V, 60 HZ	12,65 kW / 33 HP



DTF 25 SH - Propane, Vanguard

Article	Power	Wattage / HP
800076V	Vanguard, propane	23 Kw / 31 HP

Accessories

SF DTF 25 Side attachment unit


Article	Working width	Distance to wall
707534	87 mm / 3.5"	10 mm / 0.39"



Note: Side attachment and standard drum are not used together

Directional guide

Article
800136

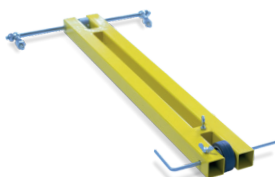

DTF 25 SH tools and drums

Sets		Drums	
707326 » 72 pcs diamond blades turbo » 125 mm / 5" & 74 washers x 2 mm » 1 x 2 mm inbetween)		707289 Application: Regular concrete	
800040 » 72 pcs diamond blades turbo » 125 mm / 5" & 74 washers x 2 mm » 1 x 2 mm inbetween		800036 Application: Hard concrete	
800187 » 72 pcs diamond blades turbo » 125 mm / 5" & 74 washers x 2 mm » 1 x 2 mm inbetween		800188 Application: Super hard concrete	
800041 » 33 pcs diamond blades turbo » 125 mm / 5" & 66 washers x 3 mm » 2 x 3 mm inbetween		800034 Application: Regular concrete	
800042 » 33 pcs diamond blades turbo » 125 mm / 5" & 66 washers x 3 mm » 2 x 3 mm inbetween		800035 Application: Hard concrete	
707410 » 24 pcs diamond blades turbo » 125 mm / 5" & 23 washers x 2 mm » 1 x 2 mm inbetween		707417 Application: Regular concrete for SF DTF 25	
800099 » 24 pcs diamond blades turbo » 125 mm / 5" & 23 washers x 2 mm » 1 x 2 mm inbetween		800098 Application: Hard concrete for SF DTF 25	
Empty drum DTF 25 701211		Empty drum SF DTF 25 707416	
Blades and spacers			
125 MM / 4.5" 709422 Application: Regular concrete		125 MM / 4.5" 701216 Application: Hard concrete	
125 MM / 4.5" 601107 Application: Super hard concrete		SPACER 2MM 701219 SPACER 3MM 701220	

DTF 35 SH

Main features

Working width	35 cm / 14"
Distance to wall	10.7 cm / 4"
Cutting depth	Up to 25 mm / 1"



DTF 35 SH, 15 kW, electric

Article	Power	Wattage / HP
800024	3×400 V, 50 HZ	15 kW / 20 HP



DTF 35 SH, 22/25 kW, electric

Article	Power	Wattage / HP
800072	3×400 V, 50 HZ	22 kW / 30 HP
800073	3×480 V, 60 HZ	25 kW / 33 HP



DTF 35 SH Propane, Vanguard

Article	Power	Wattage / HP
800025	LPG	26 kW / 35 HP

Accessories


Laser pointing kit

Article
800167



***Distance bush sets for shaft**

Article	Size	Article	Size
800119	10 cm	800122	20 cm
800120	15 cm	800123	25 cm
800121	17 cm		

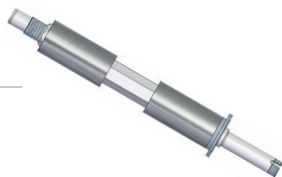

***Distance bush sets for drum**

Article	Size	Article	Size
800124	10 cm	800127	20 cm
800125	15 cm	800128	25 cm
800126	17 cm		



Weight set

Article


600956



Aiming device complete

Article

600963

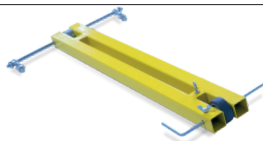

4" to 3" camlock adapter set

Article

600970



Lifting point set

Article

600969



Wheel protector set

Article























600971



*The distance sets consists of three bushings: two custom made and one universal. Shafts and drums not included.

NOTE: All accessories are supplied with their respective fasteners.

DTF 35 SH tool sets and drums

Diamond blades sets for drum	Complete drums
800043 » 27 pcs diamond blades » 80 washers x 4 mm » 12 mm space inbetween	 600306 Application: Regular concrete 
800045 » 53 pcs diamond blades » 54 washers x 5 mm » 5 mm space inbetween	 800038 Application: Regular concrete 
800145 » 59 pcs diamond blades » 63 washers x 4 mm » 4 mm space inbetween	 800142 Application: Regular concrete 
800049 » 90 pcs diamond blades » 91 washers x 2 mm » 2 mm space inbetween	 800047 Application: Regular concrete 
800044 » 27 pcs diamond blades » 80 washers x 4 mm » 12 mm space inbetween	 800037 Application: Hard concrete 
800046 » 53 pcs diamond blades » 54 washers x 5 mm » 5 mm space inbetween	 800039 Application: Hard concrete 
800144 » 59 pcs diamond blades » 63 washers x 4 mm » 4 mm space inbetween	 800143 Application: Hard concrete 
800050 » 90 pcs diamond blades » 91 washers x 2 mm » 2 mm space inbetween	 800048 Application: Hard concrete 
800151 » 27 pcs diamond blades » 80 washers x 4 mm » 12 mm space inbetween	 800150 Application: Super hard concrete 
800154 » 53 pcs diamond blades » 54 washers x 5 mm » 5 mm space inbetween	 800153 Application: Super hard concrete 
800157 » 78 pcs diamond blades » 79 washers x 3 mm » 3 mm space inbetween	 800156 Application: Super hard concrete 

Single diamond blades sets and spacers

230 MM / 9"
600951

Application:
Regular concrete



230 MM / 9"
600950

Application:
Hard concrete



230 MM / 9"
601103

Application:
Super hard concrete



SPACER 3MM

601106

SPACER 4MM

600948

SPACER 5MM

600949



EMPTY DRUM
800113



Diamond blades sets for shaft

800101

- » 27 pcs diamond blades
- » 80 × 4 mm
- » Space inbetween 12 mm



800102

- » 53 pcs diamond blades
- » 66 × 5 mm spacers
- » Space inbetween 5 mm



800148

- » 59 pcs diamond blades
- » 77 × 4 mm spacers
- » Space inbetween 4 mm



800103

- » 90 pcs diamond blades
- » 91 × 2 mm spacers
- » Space inbetween 2 mm



800104

- » 27 pcs diamond blades
- » 80 × 4 mm
- » Space inbetween 12 mm



800105

- » 53 pcs diamond blades
- » 66 × 35 mm spacers
- » Space inbetween 5 mm



800147

- » 59 pcs diamond blades
- » 77 × 4 mm spacers
- » Space inbetween 4 mm



800106

- » 90 pcs diamond blades
- » 91 × 2 mm spacers
- » Space inbetween 2 mm



800152

- » 27 pcs diamond blades
- » 80 × 4 mm & 12 × 5 mm spacers
- » Space inbetween 12 mm



800155

- » 53 pcs diamond blades
- » 54 × 5 mm
- » Space inbetween 5 mm



800158

- » 78 pcs diamond blades
- » 79 × 3 mm spacers & 12 × 35 mm spacers
- » Space inbetween 4 mm



Single diamond blades sets and spacers

230 MM / 9"
600649

Application:
Regular concrete



230 MM / 9"
600648

Application:
Hard concrete



230 MM / 9"
601101

Application:
Super hard concrete



SPACER 3MM

601105

SPACER 4MM

600258

SPACER 5MM

600364



A worker wearing a VonArx polo shirt and headphones is operating a floor scraper machine in a warehouse. The machine is white and has 'SC 33' written on it. The background shows a large industrial space with other equipment and workers.

FLOOR SCRAPERS

Efficient Removal, Impeccable Results

VonArx floor scrapers utilize high-performance oscillating technology to efficiently remove diverse flooring materials while leaving minimal residue on various substrates.

Built with robust components and adjustable blade systems, these machines feature multiple angle settings and specialized accessories for optimal performance across vinyl, carpet, ceramic, and other floor coverings.

Trusted by professionals for their Swiss-engineered reliability, VonArx scrapers combine compact, user-friendly designs with exceptional durability, ensuring consistent results and maximum productivity for demanding flooring preparation projects.

SC 20

Main features

Working width	200 - 230 mm / 7.8 - 9.1"
Distance to wall	88 mm / 3.5" (basic blade)
Power	1.5 kW
Speed	2800 RPM
Sound pressure level	≤ 90.5 db(A)
Acoustic power level	≤ 98 db(A)
Vibration level	9.76 m/s ²



Article	Power	Current
800071	230 V / 50 Hz	8.3 A
800078	115 V / 50 Hz	17.2 A
800079	115 V / 60 Hz	17.2 A



Article	Power	Current
800074	230 V / 50 Hz	10.9 A
800082	230 V / 60 Hz	10.9 A
800081	115 V / 50 Hz	22.4 A
800139	115 V / 60 Hz	22.2 A

SC 25

Main features

Working width	250 - 270 mm / 9.8 - 10.6"
Distance to wall	110 mm / 4.3" (basic blade)
Power	1.5 kW
Speed	2800 RPM
Sound pressure level	≤ 90.5 db(A)
Acoustic power level	≤ 98.0 db(A)
Vibration level	8.8 m/s ²

SC 35













Main features

Working width	350 - 370 mm / 13.8 - 14.6"
Distance to wall	60 mm / 2.4" (basic blade)
Power	1.5 kW
Speed	2800 RPM
Sound pressure level	≤ 90.5 db(A)
Acoustic power level	≤ 98 db(A)
Vibration level	8.1 m/s ²



Article	Power	Current
800077	230 V / 50 Hz	10.9 A
800084	230 V / 60 Hz	22.4 A
800083	115 V / 50 Hz	22.4 A
800140	115 V / 60 Hz	22.2 A

Blades and chisels

BASIC BLADE (SC 20) 400110 200×100×1.5 mm / 7.9×3.9×0.06"	①	
U-BLADE (SC 20) 400215 230×100×2 mm / 9.1×3.9×0.08"	②	
BASIC BLADE (SC 25) 400123 250×80×1.5 mm / 9.8×3.1×0.06"	①	
LONG BLADE (SC 25) 400238 250×130×1.5 mm / 9.8×5.1×0.06"	①	
U-BLADE (SC 25) 400213 270×80×1.5 mm / 10.6×3.1×0.06"	②	
DEBRIS BLADE (SC 25, SC 35) 400217 200×80×2.5 mm / 7.9×3.1×0.1"	③	
BASIC BLADE (SC 35) 400171 350×80×1.5 mm / 13.8×3.1×0.06"	①	
LONG BLADE (SC 35) 400218 350×130×1.5 mm / 13.8×5.1×0.06"	①	
U-BLADE BOTTOM EDGE (SC 35) 400214 370×80×1.5 mm / 14.6×3.1×0.06"	②	
U-BLADE TOP EDGE (SC 35) 400216 370×80×1.5 mm / 14.6×3.1×0.06"	②	
WIDE BLADE (SC 35) 400219 450×80×2.5 mm / 17.7×3.1×0.1"	①	
CHISEL SET (SC 25, SC 35) 400253 Chisel holder Chisel: 25×280 mm / 0.98×11" Chisel: 50×300 mm / 1.98×11.8"	④	

Applications

①	②	③	④
<ul style="list-style-type: none"> Strip floor coverings. Lift carpet tiles and foam backed carpets. Cork tiles and matting 	<ul style="list-style-type: none"> Remove felt, underlay Linoleum and vinyl flooring Matting 	<ul style="list-style-type: none"> Hard glued floor coverings Debris 	<ul style="list-style-type: none"> Tiles Parquet Hard debris

A man wearing safety glasses and a grey zip-up hoodie is using a needle scaler tool on a metal surface in a workshop. The background is slightly blurred, showing shelves and other equipment. The overall image has a blue tint.

NEEDLE SCALERS

Versatile Cleaning for Every Surface

The secret to VonArx Needle Scalers effectiveness lies in the flexible needles, which easily adapt to work on any surface, even those with projections or irregular shapes. This flexibility ensures thorough cleaning of uneven surfaces, reaching areas that other tools might miss.

We understand that different jobs require different approaches. That's why VonArx offers a range of needle scalers to suit every task. Available with 3 or 4mm needles, you'll always find the right VonArx Needle Scaler to handle your specific requirements.

B/BG serie

Main features

Needles	ø3mm, ø4mm
Sound pressure level	≤ 100.7 db(A)
Acoustic power level	≤ 110.0 db(A)
Connection thread	G 3/8"
Permitted air pressure	7 bar, 100 psi max.



***12 B**

Article	Air consumption
700263	96 L/Min, 3.4 cfm

23 BG

Article	Air consumption
700438	100 L/Min, 3.5 cfm



23 B

Article	Air consumption
700312	100 l/min, 3.5 cfm

34 B

Article	Air consumption
700364	125 L/Min, 4.4 cfm



45 B

Article	Air consumption
700409	158 L/Min, 5.6 cfm



34 BGV


Article	Air consumption	Lenght
700462	125 L/Min, 4.4 cfm	1750 mm / 69"

*Permitted air pressure - 6 bar, 87 psi max.



45 BGV

Article	Air consumption	Length
706768	158 L/Min. (5.6 cfm)	1800 mm / 71"

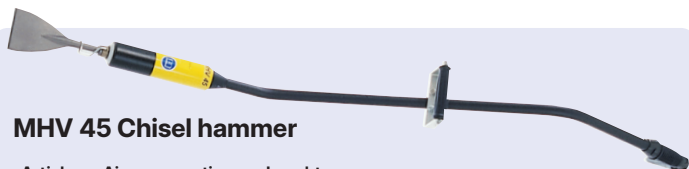

MHV 45 Chisel hammer

Article	Air consumption	Length
707404	158 L/Min. (5.6 cfm)	1350 mm / 53"

NP/NP-K serie

Main features

Needles	ø3mm, ø4mm,
Sound pressure level	≤ 100.7 db(A)
Acoustic power level	≤ 110.0 db(A)
Hose connection	G 3/8" / G 1/4"
Permitted air pressure	7 bar, 100 psi max.



NP 23

Article	Air consumption
700616	100 l/min, 3.5 cfm



NP 23 K

Article	Air consumption
700722	100 l/min, 3.5 cfm



NP 34

Article	Air consumption
700639	125 l/min, 4.4 cfm



NP 34 K

Article	Air consumption
706598	125 l/min, 4.4 cfm


Spare parts

Needle sets for NP / NP-K serie

Set needles compl.	ø 3 mm. blunt	ø 3 mm. pointed	ø 4 mm. blunt	ø 4 mm. pointed
NP 23	706188	706189	706190	706191
NP 23 K	706188	706189	706190	706191
NP 34	706193	706194	706195	706196
NP 34 K	706193	706194	706195	706196

Needle sets for B / BG serie

Set needles compl.	ø 3 mm. blunt	ø 3 mm. pointed	ø 4 mm. blunt	ø 4 mm. pointed
12 B	700254	700255		
23 B	700298	700300	700299	700301
23 BG	700298	700300	700299	700301
34 B	700350	700352	700351	700353
34 BGV	700350	700352	700351	700353
45 B	700397	700399	700398	700400
45 BGV	700397	700399	700398	700400



Accessories

VAC connector assembly

NP 23 / K	NP 34 / K	23 B / BG	34 B
700602	700628	700280	700628



Additional handle

NP 23 / K	NP 34 / K	23 B / BG	34 B	45 B
700081	700342	700081	700342	700395



Conversion kit

23 B / BG	34 B / BGV	45 B / BGV / MHV
709551	709552	709553



Case


Standard with B serie
711262





PNEUMATIC SCABBLERS

Power and Precision in Surface Preparation



VonArx Pneumatic Scabblers are the go-to tools for professionals facing tough surface preparation tasks. These robust machines excel at quickly removing a wide range of surface imperfections and unwanted materials.

Our pneumatic scabblers make light work of laitance, projections, encrustations, and scale deposits. They effortlessly strip away old color and rust, while also providing the capability to smooth or roughen surfaces as needed. This versatility makes them indispensable across various industries and applications.

DK 1 H

Main features


Max. air pressure	7 bar (100 psi)
Vibration on handle	13.7 m / s ²
Sound pressure	≤ 86.7 db(A)
Acoustic power	≤ 94.7 db(A)



DK 2 H

Main features

Max. air pressure	7 bar (100 psi)
Vibration on handle	15.2 m / s ²
Sound pressure	≤ 86.6 db(A)
Acoustic power	≤ 94.6 db(A)

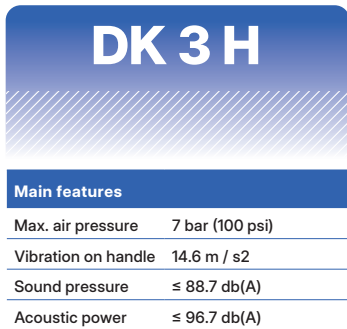

DK 3 H

Main features

Max. air pressure	7 bar (100 psi)
Vibration on handle	14.6 m / s ²
Sound pressure	≤ 88.7 db(A)
Acoustic power	≤ 96.7 db(A)



DK 7

Main features

Max. air pressure	7 bar (100 psi)
Vibration on handle	8.3 m / s ²
Sound pressure	≤ 98.7 db(A)
Acoustic power	≤ 108.2 db(A)

Spare parts

PISTON SET - DK 1H

700769

1 Piston with tungsten crown - 0.36 kg / 0.79 lbs



PISTON SET - DK 2 H

700771

2 Pistons with tungsten crown - 0.72 kg / 1.59 lbs



PISTON SET - DK 3 H

700773

3 Pistons with tungsten crown - 1.08 kg / 2.38 lbs



PISTON SET - DK 7

700579

7 Pistons with tungsten crown and wearing ring



DUST EXTRACTORS

Protecting Your Team, Enhancing Your
Productivity

VonArx Dust Extractors are the essential companions to our range of surface preparation tools. These robust and safe units are specifically designed to seamlessly connect with our Scarifiers, Shavers and Grinders, creating a cleaner and healthier work environment.

By incorporating VonArx Dust Extractors into your workflow, you're not just improving air quality – you're investing in your team's health and boosting overall productivity. Our extractors work tirelessly to remove harmful dust and debris, allowing your staff to focus on the task at hand without compromising their well-being.

S-line

S2



Main features

Air flow	400 m3 / 235 cfm
Vacuum	22 kPa / 100" water lift
Pre filter	Conical polyester
Pre filter surface	3 m2 / 32.3 Ft2
HEPA filter	H13
HEPA filter surface	2.4 m2 / 25.8 Ft2

Article	Voltage	Amperage	Power
S201-EU	230 V, 50 Hz	9.8 A	2×1200 W
S202-UK	115 V, 50 Hz	16/15 A	2×1000 W
S203-US	115 V, 60 Hz	16/15 A	2×1000 W

S3



Main features

Air flow	600 m3 / 285 cfm
Vacuum	22 kPa / 80" water lift
Pre filter	Conical polyester
Pre filter surface	4.5 m2 / 48.8 Ft2
HEPA filter	H13
HEPA filter surface	3.6 m2 / 38.8 Ft2

Article	Voltage	Amperage	Power
S301-EU	230 V, 50 Hz	15 A	3×1200W
S302-UK	115 V, 50 Hz	18 A	3×700W
S303-US	115 V, 60 Hz	18 A	3×700W

Spare parts

CONICAL PREFILTER S2 7500016		CONICAL PREFILTER S3 7500024	
HEPA FILTER 7500000		LONGOPAC 7500017	
LONGOPAC HOLDER 7000016		3 PIECE 50 MM / 2" WAND 7500142	
HOSE END CUFF 50 MM / 2" 7500018		RUBBER SQUEEGES, PAIR 7509996	
CONNECTOR D51 HOSE WITH V SEALING 800161		FLOOR TOOL 7500143	
CONNECTOR D63 HOSE V SEALING (S3 ONLY) 800165		FRONT CASTERS 7500165	
HOSE SET D63 (S3 ONLY) 7001159		HOSE SET D50 MM X 7,5M 7001064	
REAR WHEELS 7500014			
MOTOR SET S2/S3, 230 V 800180		MOTOR SET S2, 120 V 800204	
MOTOR SET S3, 120 V 800205		ON/OFF SWITCH 7500001	
SOFT START S2, 230 V / 120 V 7500172		SOFT START S3, 230 V / 120 V 900943	

T-line

T6



Main features

Power	2 × 3 kW / 8 HP
Air flow	630 m3 / 371 cfm
Vacuum	27 kPa / 108" water lift
Pre filter	Conical polyester x 4
Pre filter surface	6 m2 / 64.6 Ft2
HEPA filter	H13 × 2
HEPA filter surface	5 m2 / 53.8 Ft2

Article	Voltage	Amp.	Power
T601-EU	3×400 V, 50 Hz	14.4 A	2 × 3 kW
T603-US	3×480 V, 60 Hz	14.6 A	2 × 3 kW

T7 / T8



Main features

Air flow	600 m3 / 353 cfm
Vacuum	28 kPa / 112" water lift
Pre filter	Polyester socks x 15
Pre filter surface	2.3 m2 / 25 sqf
HEPA filter	H13
HEPA filter surface	5 m2 / 54 sqf

Article	Voltage	Amp.	Power
750010051	3×400 V / 50 Hz	15 A	5,5 kW
75001021	3×230 V / 60 Hz	24 A	7,5 kW
75001031 (T8)	3×480 V / 60 Hz	14 A	8,6 kW

T10



Main features

Air flow	900 m2 / 530 cfm
Vacuum	33 kPa / 132" water lift
Pre filter	Polyester socks
Pre filter surface	3.6 m2 / 39 sqf
HEPA filter	H13
HEPA filter surface	5.0 m2 / 54 sqf

Article	Voltage	Amp.	Power
75002041	3×400 V / 50 Hz	14.5 A	10 kW
75002031	3×480 V / 60 Hz	12 A	10 kW

T10 LPG



Main features

Air flow	900 m ² / 530 cfm
Vacuum	33 kPa / 132" water lift
Pre filter	Polyester socks
Pre filter surface	3.6 m ² / 39 sqf
HEPA filter	H13
HEPA filter surface	5.0 m ² / 54 sqf
Centrifugal clutch	Custom, allowing no-load starting

Article	Motor	Power
75002061	27 HP	LPG

Spare parts

CONICAL POLYESTER
PRE-FILTER (T6)
7509999



HEPA FILTER (T6)
7500032



PRE FILTER ASSEMBLY
(T7, T8)
70530700-20



HEPA FILTER (T7, T8)
91020113-04



PRE FILTER ASSEMBLY
(T10)
70531171-20



HEPA FILTER (T10)
91020113-05



CAMLOCK FEMALE 3" TO
3" (76MM)
7500145



10M X 76MM HOSE
601142



7,5M X 50MM HOSE (T6,
T7, T8)
601173



CAMLOCK FEMALE
COUPLER 3" TO D50
(T6, T7, T8)
900841



FLOOR TOOL DIA 50
CURVE (T6, T7, T8)
7500143



SET OF RUBBER
LIPS L440+395 (T6,
T7, T8)
7509996



WAND, 3 PIECES 50MM
(T6, T7, T8)
7500142



Pre-separators

Pre-separator C3

Article	C301	Dimensions	543 × 737 × 1449 mm 21,4 × 29,0 × 57,0"
Dust collection	Longopac	Weight uncrated	37,5 kg / 83 lbs
Main hose diameter	76 mm / 3"	Main Hose lenght	7,5 m / 25 ft
Pairing with S2 and S3 dust extractors			



Pre-separator C5

Article	75102051	Dimensions	630 × 711 × 1626 mm 25 × 28 × 64"
Dust collection	Longopac	Weight uncrated	75 kg / 165 lbs
Main hose diameter	76 mm / 3"	Main Hose lenght	10 m / 32.8 ft
Pairing with T6 , T7 , T8 and T10 dust extractors			



Pre-separator C5 Big Bag

Article	800170	Dimensions	1099 × 735 × 1835 mm 43.2 × 28.9 × 72.2"
Dust collection	Big Bag	Weight uncrated	78 kg / 172 lbs
Main hose diameter	76 mm / 3"	Main Hose lenght	10 m / 32.8 ft
Pairing with T7 , T8 and T10 dust extractors			



COMMITTED TO EXCELLENCE

Our dedication to quality is not just a promise – it's our legacy. Since 1941, we have consistently provided true quality in every product we manufacture. As we look to the future, we remain committed to upholding this standard of excellence for the next 80 years and beyond.

**CHOOSE VONARX FOR RELIABLE,
HIGH-PERFORMANCE SURFACE
PREPARATION MACHINES AND
PNEUMATIC TOOLS THAT STAND THE
TEST OF TIME.**



**von
arx**®
TRUE QUALITY SINCE 1941

20, Nedyalka Shileva street
Trakiya 4023
Plovdiv Bulgaria

+359 32 940553
order@vonarx.com
info@vonarx.com

www.VONARX.com